

Ultra High Precision, High Resolution Z-Foil Audio Resistor, with TCR of $\pm 0.2 \text{ ppm}/^\circ\text{C}$, Tolerance to $\pm 0.01 \%$ and Noise $< -40 \text{ dB}$



Any value at any tolerance available within resistance range

INTRODUCTION

The VAR, composed of Vishay's Bulk Metal[®] Z-foil technology, with improved sound quality, provides a combination of low noise and low inductance/capacitance, making it unrivalled for applications requiring low noise and distortion-free properties.

While the regular foil resistors are already widely acknowledged as the leading resistors for audio applications, the special "naked Z-foil resistor" design without mold or encapsulation, adds an additional dimension for reducing signal distortion and increasing clarity in signal processing.

Our application engineering department is available to advise and to make recommendations. For non-standard technical requirements and special applications, please contact us.


FEATURES

- Temperature coefficient of resistance (TCR):
- -55°C to $+125^\circ\text{C}$, 25°C ref.
 $\pm 0.2 \text{ ppm}/^\circ\text{C}$ typical (see table 1)
- Rated power: to 0.4 W at $+70^\circ\text{C}$
- Tolerance: to $\pm 0.01 \%$
- Load life stability: to $\pm 0.01 \%$ at 70°C , 2000 h at rated power
- Resistance range: 10Ω to $100 \text{ k}\Omega$ (higher or lower values of resistance are available)
- Electrostatic discharge (ESD) above 25 000 V
- Non inductive, non capacitive design
- Rise time: 1 ns without ringing
- Current noise: $< -40 \text{ dB}$
- Thermal EMF: $0.05 \mu\text{V}/^\circ\text{C}$ typical
- Voltage coefficient: $< 0.1 \text{ ppm/V}$
- Low inductance: $< 0.08 \mu\text{H}$ typical
- Non hot spot design
- Terminal finishes available: lead (Pb)-free tin/lead alloy



RoHS*
COMPLIANT

FIGURE 1 - TYPICAL TCR CURVE Z-FOIL

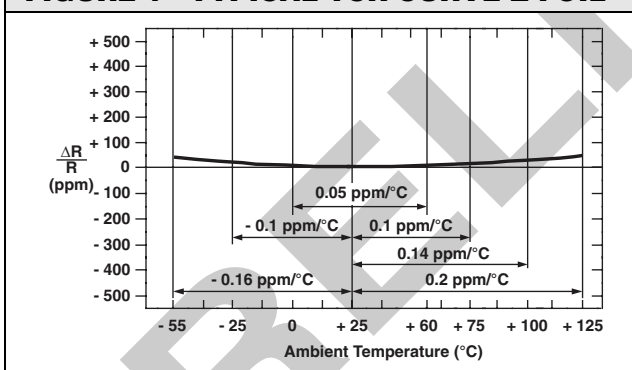

APPLICATIONS

- High precision amplifiers
- High-end speaker system
- High-end audio circuit
- Transducer
- High fidelity audio amplifier

TABLE 1 - RESISTANCE VERSUS TCR (-55 °C to +125 °C, +25 °C Ref.)

RESISTOR	RESISTANCE VALUE (Ω)	TYPICAL TCR AND MAXIMUM SPREAD ($\text{ppm}/^\circ\text{C}$)	TIGHTEST TOLERANCE (%)
VAR	100 to $< 100\text{K}$	$\pm 0.2 \pm 1.8$	0.01
	50 to < 100	$\pm 0.2 \pm 2.8$	0.01
	10 to < 50	$\pm 0.2 \pm 3.8$	0.02

Note:

- For other values and tighter tolerances, please contact application engineering using the footer below

* Pb containing terminations are not RoHS compliant, exemptions may apply

VAR (Vishay Audio Resistor)



Vishay Foil Resistors Ultra High Precision, High Resolution Z-Foil Audio Resistor,
with TCR of $\pm 0.2 \text{ ppm}/^\circ\text{C}$, Tolerance to $\pm 0.01 \%$
and Noise $< -40 \text{ dB}$

FIGURE 2 - STANDARD DIMENSIONS

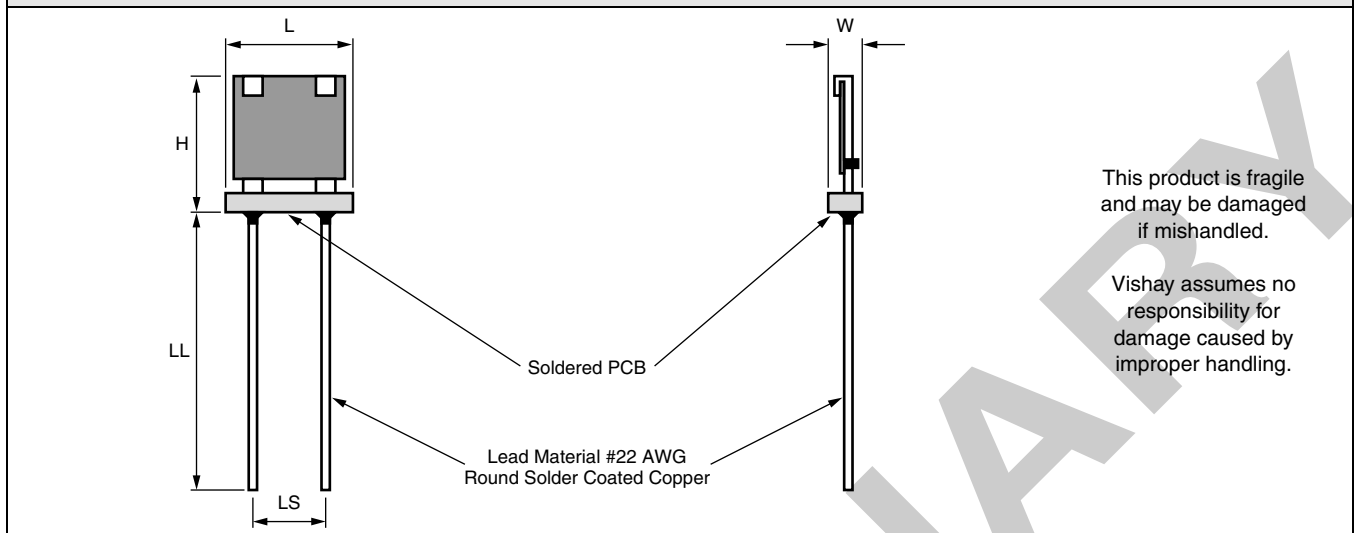


TABLE 2 - SPECIFICATIONS

RESISTANCE RANGE (Ω)	MAXIMUM WORKING VOLTAGE	AMBIENT POWER RATING		DIMENSIONS	
		at $+70^\circ\text{C}$	at $+125^\circ\text{C}$	INCHES	mm
10 to 100K	200	0.4 W	0.2 W	W: 0.080 max. L: 0.250 max. H: 0.310 max. LL: 1.000 ± 0.125 LS: 0.150 ± 0.005	W: 2.03 max. L: 6.35 max. H: 7.87 max. LL: 25.4 ± 3.18 LS: 3.81 ± 0.13

FIGURE 3 - POWER DERATING CURVE


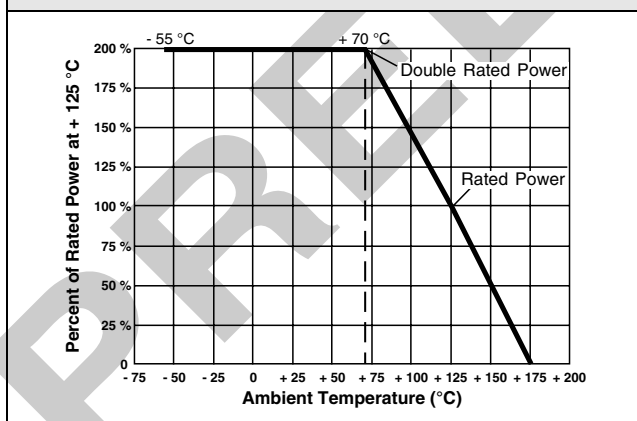


FIGURE 4 - TRIMMING TO VALUES
(Conceptual Illustration)



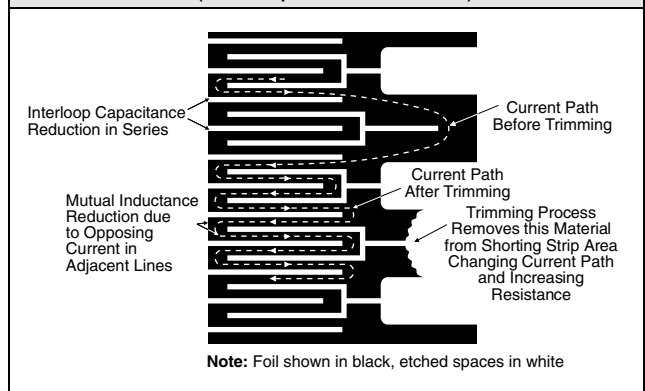


VAR (Vishay Audio Resistor)

Ultra High Precision, High Resolution Z-Foil Audio Resistor, Vishay Foil Resistors
 with TCR of $\pm 0.2 \text{ ppm}/^\circ\text{C}$, Tolerance to $\pm 0.01 \%$
 and Noise $< -40 \text{ dB}$

TABLE 3 - GLOBAL PART NUMBER INFORMATION

NEW GLOBAL PART NUMBER: Y070680K5000T9L (preferred part number format)

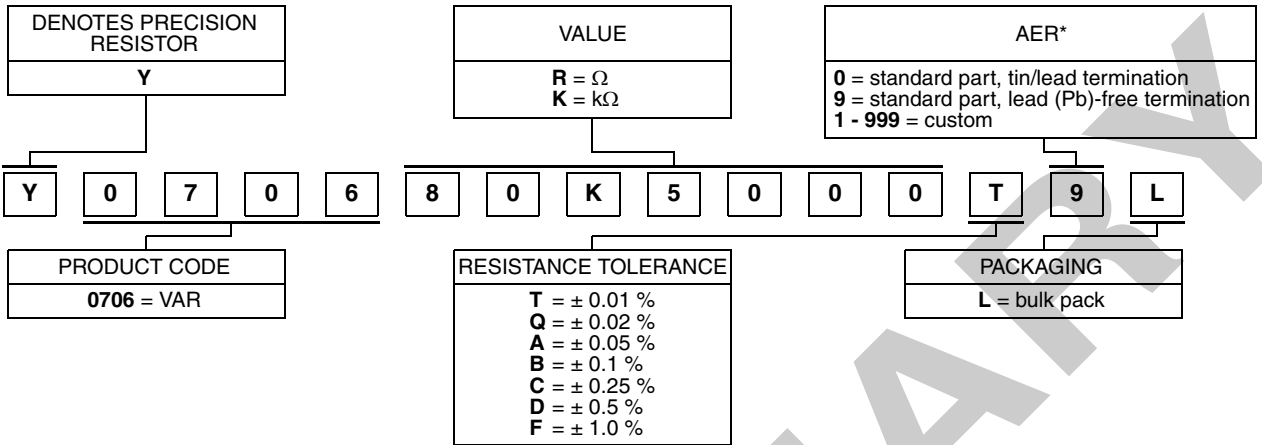


FOR EXAMPLE: ABOVE GLOBAL ORDER Y0706 80K5000 T 9 L:

TYPE: VAR
 VALUE: $80.5 \text{ k}\Omega$
 ABSOLUTE TOLERANCE: $\pm 0.01 \%$
 TERMINATION: lead (Pb)-free
 PACKAGING: bulk pack

Note

* Application engineering release: for non-standard requests, please contact application engineering.

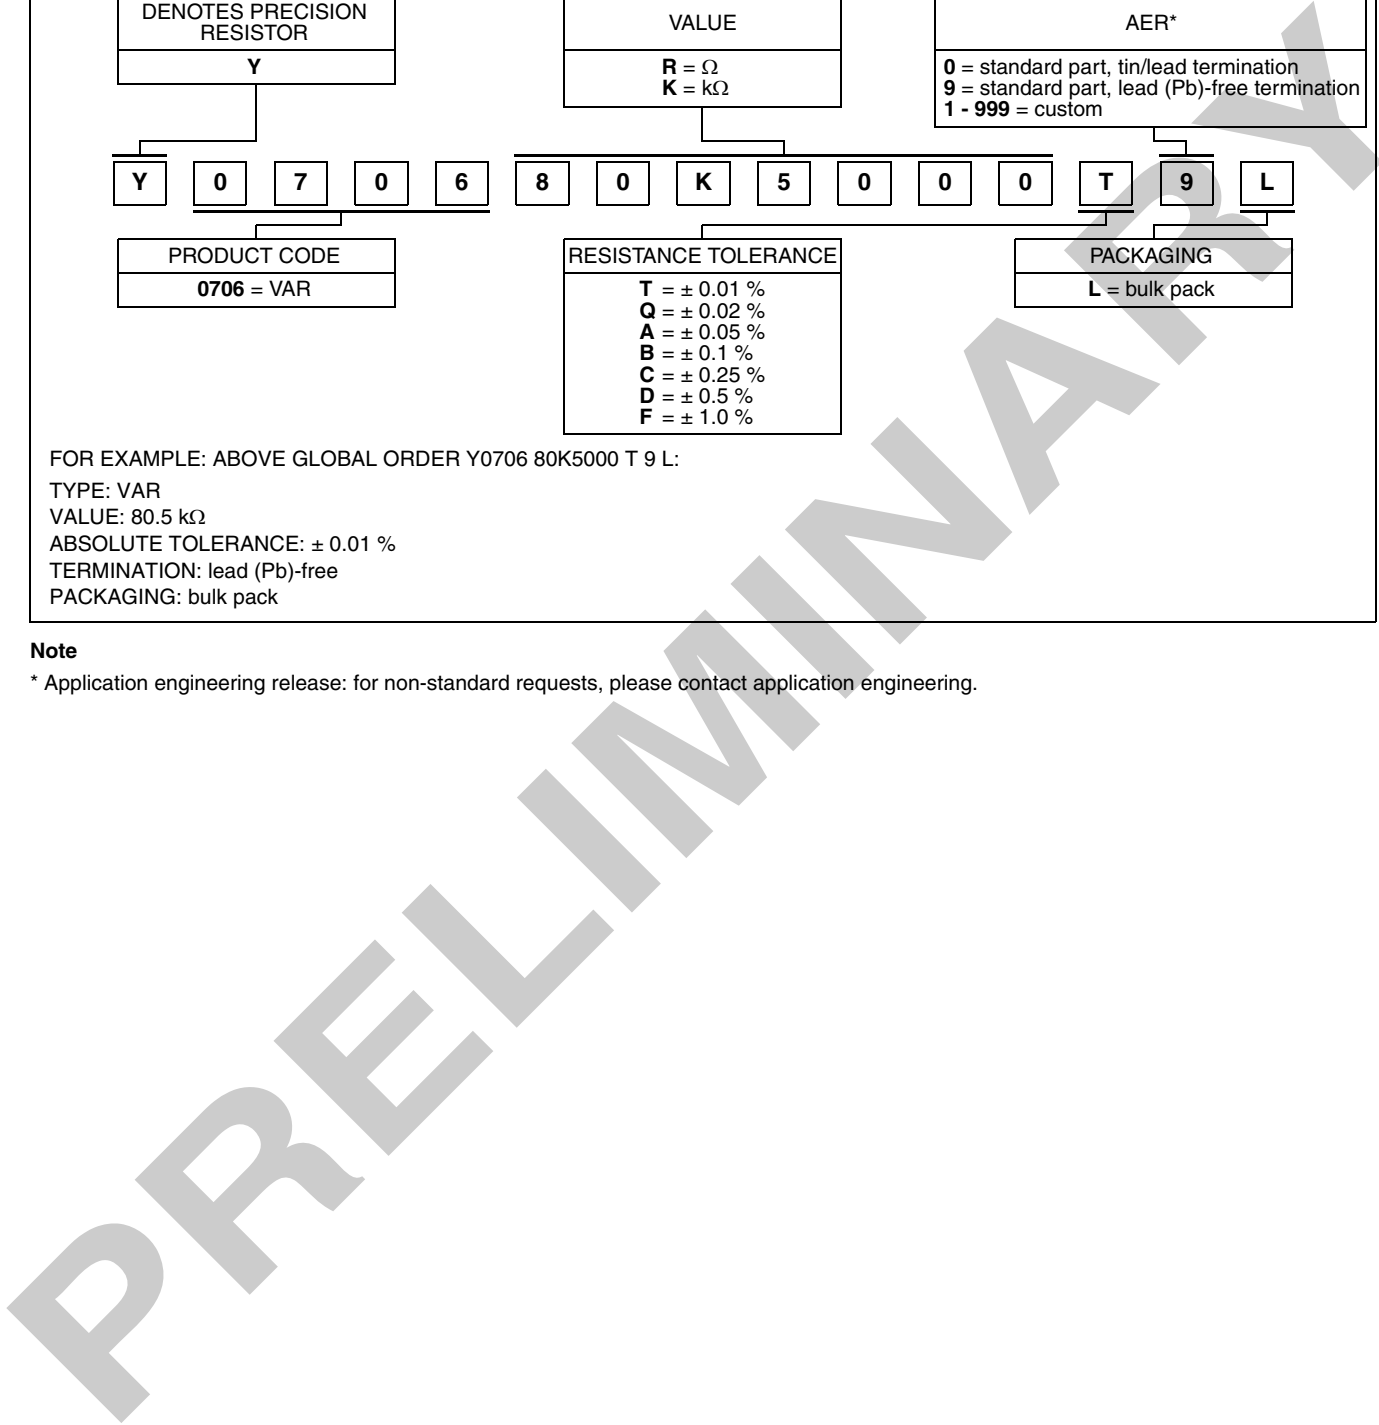



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.